



WINDY BOY 3000-US

WB 3000US



UL Certified

- For the North American small wind market (UL 1741/IEEE-1547)

Efficient

- Peak efficiency of 96.5%
- OptiCool™ active temperature management

Easy to Use

- Programmable polynomial curve enables free selection of turbines

Reliable

- Galvanic isolation due to integrated transformer


WINDY BOY 3000-US

A reliable option with UL certification

User-friendly, safe and reliable, the Windy Boy 3000-US is specially certified for locations requiring UL certification. The automatic grid voltage detection* allows for straightforward and secure installation. The aluminum die-cast enclosure and the OptiCool active cooling system ensure optimal yield as well as a long lifespan, even under adverse operating conditions.

* US-Patent US7352549B1

Technical data	Windy Boy 3000-US	
	208 V	244 V
Input (DC)		
Max. DC power	3200 W	
Max. DC voltage	500 V	
DC nominal voltage	250 V	
Min. open circuit voltage for activating "Turbine Mode"	228 V	
Operating range "Turbine Mode"	180 V - 500 V	200 V - 500 V
Max. input current	17 A	
Output (AC)		
AC nominal power	3000 W	
Max. AC power	3050 W	
Max. output current	15 A	
Nominal AC voltage / AC operating range	183 - 229 V / -	211 - 264 V / -
AC grid frequency / range	60 Hz / 59.3 - 60.5 Hz	
Power factor (cos φ)	1	
Phase conductors / connection phases	1 / 1	
Efficiency		
Max. efficiency	96.6%	
CEC	95.0%	95.5%
Protective devices		
DC reverse-polarity protection	●	
AC short-circuit protection	●	
Galvanically isolated	●	
Protection class / overvoltage category	I / III	
General data		
Dimensions (W / H / D) in mm (in)	450 / 352 / 236 (18 / 14 / 9)	
Weight	40 kg (88 lb)	
Operation temperature range	-25 °C ... +45 °C (-13 °F ... +113 °F)	
Noise emission (typical)	≤ 40 dB	
Internal consumption in standby	0.1 W	
Topology	LF transformer	
Cooling concept	OptiCool	
Climatic category (per IEC 60721)	4K4H	
Mounting location: indoor / outdoor (NEMA 3R)	● / ●	
Features		
Display: text line / graphic	● / -	
Communication: RS485 / Bluetooth	○ / ○	
Warranty: 10 years	●	
Certificates and permits	FCC, Part 15, Class A & B, UL 1741, IEEE-1741	
Data at nominal conditions		
● Standard features ○ Optional features - Not available		
Type designation	WB 3000US	

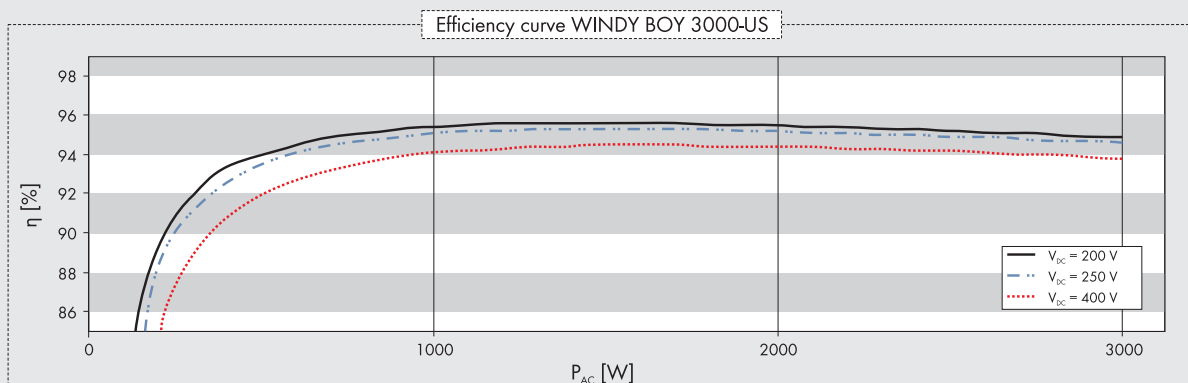

WB3000USDUST03816 - Windy Boy and SMA are registered trademarks of SMA Solar Technology AG. Text and figures comply with the state of the art applicable when printing. Subject to technical changes. We accept no liability for typographical and other errors. Printed on chlorine-free paper.